


DUCHESNE COUNTY MONUMENT SURVEY RECORD


T1S R7W
 SEC 19
 SEC 30

U.S.B.&M.

J-3



NOTE:
 THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM
 G.P.S. OBSERVATIONS AT A CONTROL POINT LOCATED AT
 LAT: 40°21'07.23762"N AND LONG: 110°42'37.33941"W
 USING THE UTAH STATE G.P.S. VIRTUAL REFERENCE STATION
 CONTROL NETWORK MAINTAINED AND OPERATED BY THE
 AUTOMATED GEOGRAPHIC REFERENCE CENTER

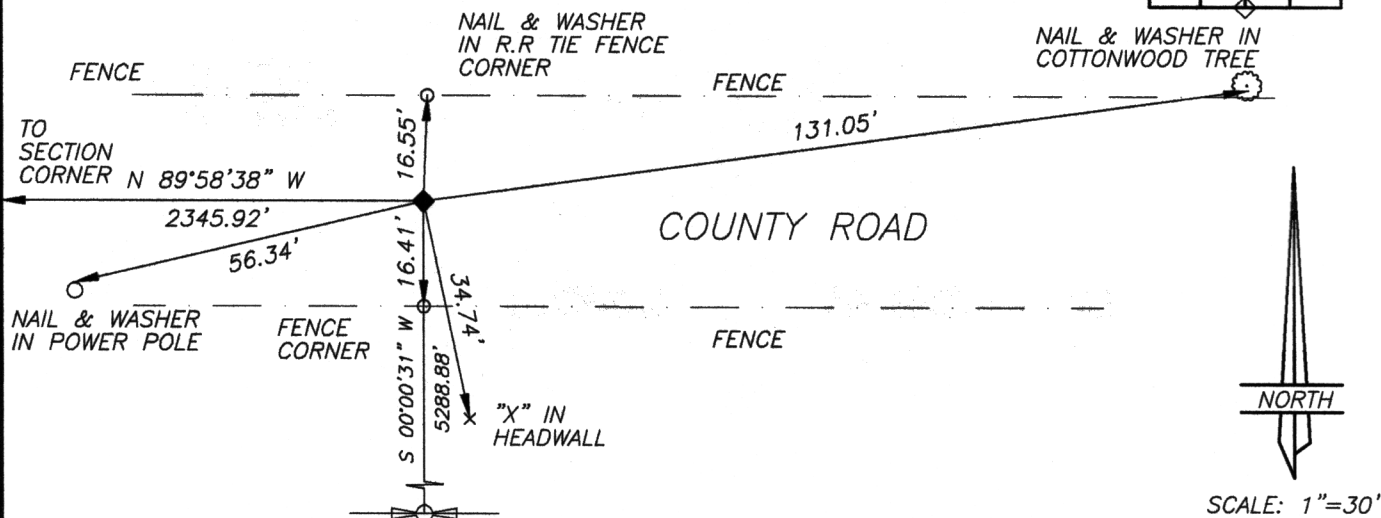

DESCRIPTION OF CORNER EVIDENCE FOUND

THE POSITION OF THIS CORNER WAS DETERMINED BY THE LOCATION OF
 RIGHT-OF-WAY FENCES AND AN OLD NORTH-SOUTH FENCE LINE

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE
 THE ORIGINAL LOCATION OF THE CORNER

A MONUMENT SPIKE WAS SET IN THE ASPHALT OF THE COUNTY ROAD

REFERENCED AS SHOWN

STATE PLANE COORDINATE DATA
 (U.S. SURVEY FEET)
 NAD 83 UTAH CENTRAL ZONE
 7304963.981
 1858229.446

LATITUDE: 40°22'17.03163" N
 LONGITUDE: 110°43'05.67661" W
 PUBLIC LAND SURVEY SYSTEM GCDB ID NO. UT300010S0070W0_140300

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do
 hereby certify that I have performed or reviewed the work done on the
 diagrammed corner as reported on this recordation form and approve same

Date 27 Sep 2010

Jerry D. Allred, Professional Land Surveyor
 Certificate No. 148951
 Duchesne County Surveyor

